


High Solids Matt Floor Finish

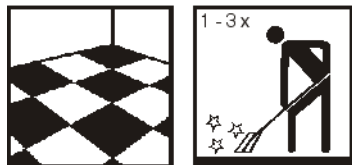

Uses

Matt polymer based self-shining dispersion. Forms a resilient easy-care protective film with a silky matt finish.

For the treatment of elastic floor coverings such as PVC, linoleum, as well as slightly porous natural and artificial stone. Suitable for hospitals, administration buildings, schools, old age homes etc.

Application

Proflor HM is applied using a mop or polish applicator. 1-3 coats can be applied to the floor surface. Before application, ensure that the floor is free from dirt and that any previous treatments to the floor have been removed using the appropriate polish stripper. Buffing is required after application. For stripping methods, refer to our polish stripper info sheets.

Note

Sensitive to frost. Shake before use.

Dilution

Concentrated

Supplies

5lt container – P07235

Compounds

- Polymers
- Waxes
- Plasticizers
- Matting agents
- Preservatives

Technical Specifications



Description	Result
Colour	Milky
pH in concentrate	8.0 ± 0.5
Specific Gravity at 20°C	1.030 g/ml

Specifications and details are subject to change without prior notice

Common Problems

Problem	Cause	Remedy
Low Gloss	Improper floor preparation	Use recommended stripper
	Porous substrate	Seal floors
	Poor recoat	Allow polish to dry completely
Hazing	Environmental conditions	Allow longer drying times under high humidity. Light buffing to removing "Ghosting"
	Incompatibility with the substrate or sealer	Check compatibility. Only use polishes and sealers that are recommended.
Levelling	Residue on the floor	Strip and wash floors to remove any contaminants.
	Insufficient plasticizer and wetting agent in polish	Add more plasticizer and wetting aid to polish.
Tackiness	Inadequate drying	Allow longer drying times between coats.
Water spotting	Too much wetting agent	Reduce wetting agent
	Inadequate plasticizer	Increase level or type of plasticizer
Powdering	Poor film formation	Increase plasticizer or coalescent.
Premature loss of gloss	Contamination of substrate	Strip and clean floor
Swirling	Equipment	Check buff pad, speed and pressure.
	Polish may not be suitable for buffing	Use a buffable wax in formula
Dirt pick up	Soft polish	Reduce coalescent and plasticizer.